

SUKKAH ROOF ASSEMBLY INSTRUCTIONS

STAGE 1

Once your sukkah is standing, place the L shaped bracket **inside** the upright poles of your sukkah.


Please note: there are 2 brackets for the right side & 2 for the left & they are not interchangeable. There are 2 different heights of brackets for each side.



(If you have rubbers in the top of the pole remove them with pliers)

STAGE 2

Now insert the square long bars into the brackets with the protruding squares facing inwards.

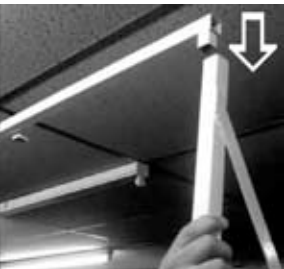

STAGE 3

You will now place the arched bars on top of the sukkah. Also place the roof material with the rings facing up on top of the sukkah and slide the corresponding rings through the arched bars.




Then place the corners of the arched bars into the corners of the cross bar

STAGE 4

On one end of the material you will find string. Unravel the string and pass one end through the nearest pulley and the other end over the roof material through the other pulley.

Now, attach the other end of the material to the square cross pole by pushing the last rings over the end of the arched poles.

Finally screw the arched bars in place.

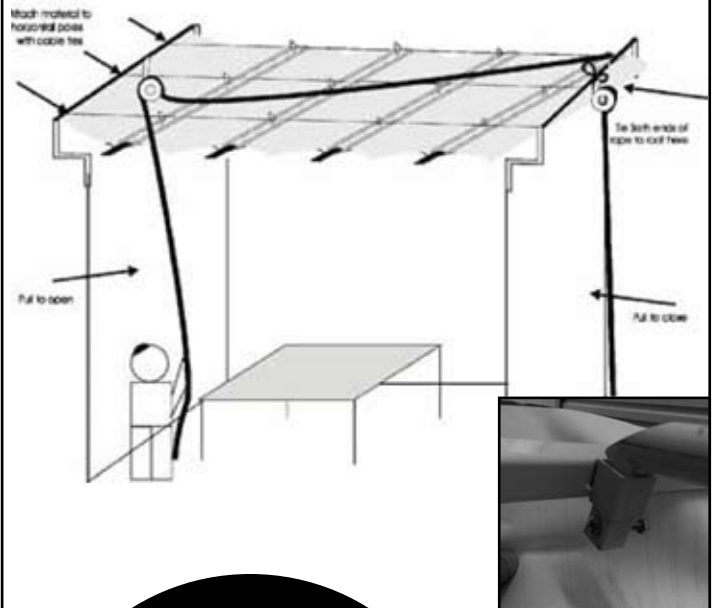

PLEASE NOTE:

This sukkah roof will make your sukkah top-heavy. Make sure your Sukkah is secured tightly to a wall or the ground and is protected from strong winds.